

**AN ADVANCE FEATURE DIGITAL  
SATELLITE RECEIVER/TRANSCODER FOR  
PROGRAMMERS AND DIGITAL OPERATORS**

**HIGHLIGHTS INCLUDE:**

- MPEG-4 HD to MPEG-2 HD transcoding
- Advanced Modulation support with DVB-S2 and 8PSK TurboCode
- Gig-E and dual ASI transport outputs
- 1RU chassis design
- Eight RF Inputs (L-Band)
- Variable tuning from 4 MHz to 36 MHz
- VBI and Ancillary Data support
- DigiCipher® II conditional access control
- Quick disconnect screw terminals for easy installation
- ASI input
- 10/100 BaseT Ethernet port for SNMP monitoring and control
- Outputs NTSC video and analog audio for confidence monitoring

For more information regarding any of these features contact your Motorola sales representative.

# DSR-6050

## Commercial Integrated Receiver/Transcoder



The DSR-6050 Integrated Receiver/Transcoder from Motorola brings revolutionary technology advances from a recognized leader in satellite program delivery. With the increased demand for HD services, programmers are looking for new distribution architectures taking advantage of emerging technology trends such as HD video processing, MPEG-4 AVC, and advanced modulation. The DSR-6050 is a next generation commercial satellite receiver, capable of transcoding MPEG-4 HD services into a MPEG-2 HD service output.

Packaged in a 1 RU chassis, the Motorola DSR-6050 comes equipped with industry standard output interfaces such as Gig-E and dual ASI outputs that enable seamless connections to head-end equipment. With advanced modulation support, the DSR-6050 supports 8PSK Turbo and DVB-S2 modulation.

## TECHNICAL SPECIFICATIONS

### L-Band Input

Input Frequency:	950 - 2150 MHz
Input Impedance:	75 Ω
Input Connectors:	Eight (8) F-type
LNB Power Out F-Connector:	16V DC min/450 mA
Port-to-Port Isolation:	40 db (minimum)

### Digital Processing

Modulation Modes:	QPSK, QPSK, 8PSK turbocodes, and DVB-S2
Symbol Rates:	3.25 to 29.27 Msps (QPSK), 1 to 30 Msps (8PSK turbocodes), 5 to 30 Msps (DVB-S2)
QSPK FEC Rates:	1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 7/8 (@3.25 to 29.27 Msps) 5/11 (@ 19.51 and 29.27 Msps)
8SPK (turbo) FEC Rates:	2/3 (1.9), 3/4 (2.05), 3/4 (2.11), 3/4 (2.19), 5/6 (2.30), 8/9 (2.40)
DVB-S2 FEC Rates:	3/5, 2/3, 3/4, 5/6, 8/9, 9/10
Eb/No:	4.0 db @ 19.5 Msps (FEC=3/4)

### Composite Video Monitoring Output

Frequency Response (NTSC):	±0.9 dB, 1 kHz - 4.2 MHz
Output Impedance:	75 Ω
Output Level:	1.0V p-p ± 10%

### Audio Monitoring Output

Output:	2 stereo pair or 4 mono
Output Level:	±16.0 dBm, ±1.0 dB into 600 Ω balanced
Impedance:	50 Ω
Connector:	Quick disconnect screw terminal

### Ethernet Output

Ethernet Type:	10/100 Base T
Connector:	RF-45

### Gig-E Output

Ethernet Type:	10/100/1000 Base-T
Connector:	RJ-45

### ASI Output/Input

Format:	Asynchronous serial interface
Transmission:	Data byte and packet
Standard:	CENELEC EN 50083-9
Connectors:	BNC (2 Out, 1 In)

### Contact Closures


Number of Closures:	4 (1 alarm)
Type:	Form C

### Physical

Operating Temperature:	0° to 40°C
Humidity:	95%, relative maximum
Dimensions:	48 cm/18.90" (W) x 46 cm/18.11" (D) x 4.2 cm/1.65" (H)
Weight:	12 lbs (approx.)
Power Input:	100-240 VAC, 50-60 Hz, 60 W
Display:	2 line, 40 character LCD

### Other

Limited Warranty:	One year
UL:	Listed/approved

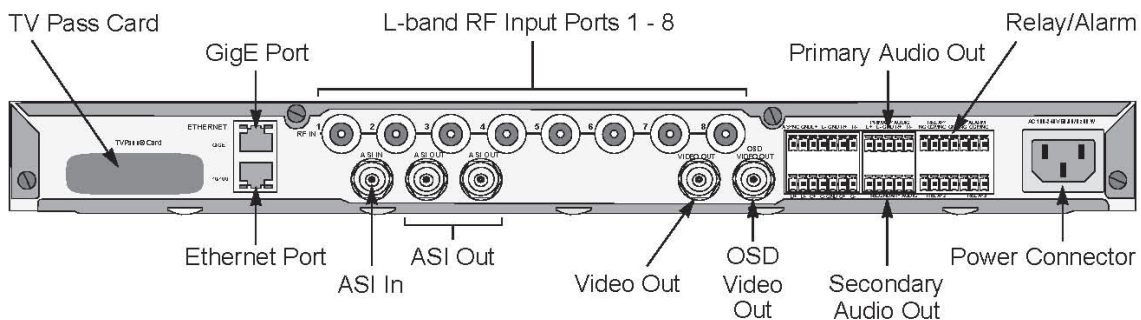

Distributed by: Mega Hertz 800-883-8839  
sales@go2mhz.com www.go2mhz.com

MOTOROLA and the Stylized M Logo are registered in the U.S. Patent and Trademark Office. DigiCipher is a registered trademark of General Instrument Corporation, a wholly-owned subsidiary of Motorola, Inc.

All other product or service names are the property of their registered owners. © Motorola, Inc. 2007 All rights reserved.

Features and functions subject to change without notice.  
5807-1007-0K