


2500-CH#

Headend deletion filters available 2-114 & sub bands.
2500's are C&E's headend grade deletion filters that delete a single TV channel with minimum impact on the adjacent channels.

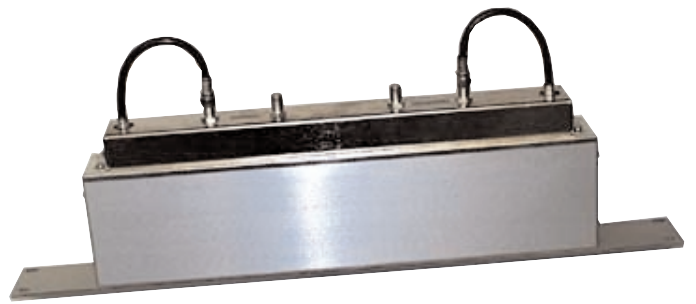

CHANNELS AVAILABLE:

STOPBAND:

ATTENUATION:

IMPEDANCE:

CONNECTORS:

PACKAGE:

FORMAT:

2-114

4.5MHz wide

(37-85) >50dB from channel Video to Channel Audio

(2-36) >50dB on channel's Video & Color

>45dB at channel's Audio

>30dB Mid-channel

75 OHM

"F" females

Rack mount, "19" by 1 3/4"

NTSC, other formats available upon request.

ADJACENT CHANNEL LOSS

CHANNELS	PASSBAND	AUDIO dB	VIDEO dB
2-6	550MHz	4.0	4.0
A-5-22(I)	550MHz	5.0	4.0
7-13	550MHz	5.5	4.5
23(J)-36(W)	650MHz	8.0	6.0
37(AA)-59(WW)	900MHz	5.0	4.0
60(XX)-85(WWW)	1GHz	5.0	4.0



Distributed by: Mega Hertz

800-883-8839

sales@megahz.com

www.megahz.com